





CP280W User Manual

Operating Voltage :	DC12V	DC24V
Operating Current:	500mA	250mA


A.12VDC Input:

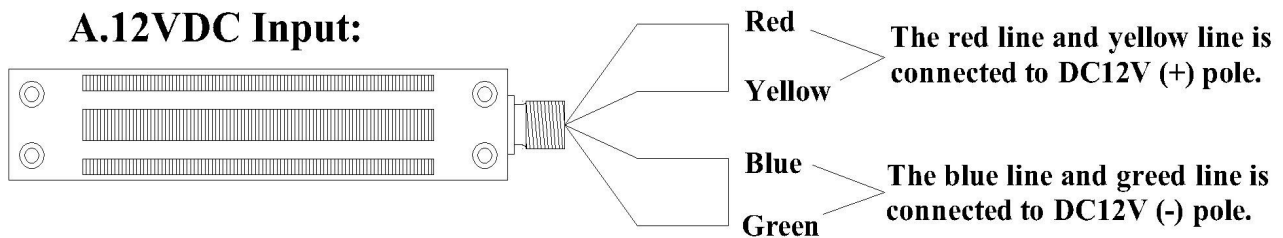

B.24VDC Input:

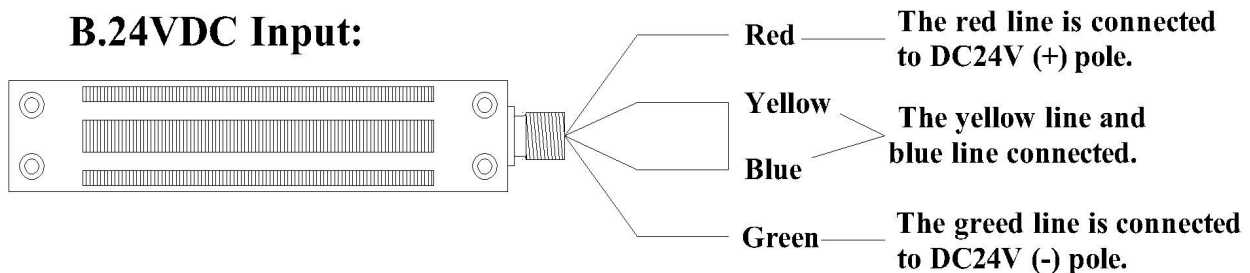


C. Connection method of backflow prevention diode:

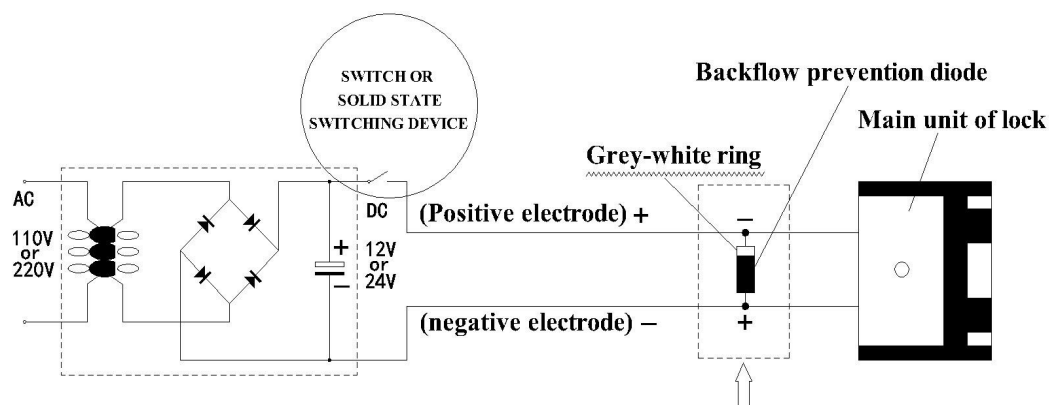

Connection method of backflow prevention diode:

- A. Connect the negative electrode of diode with the positive electrode of lock body.
- B. Connect the positive electrode of diode with the negative electrode of lock body.

Magnetic lock dimension drawing

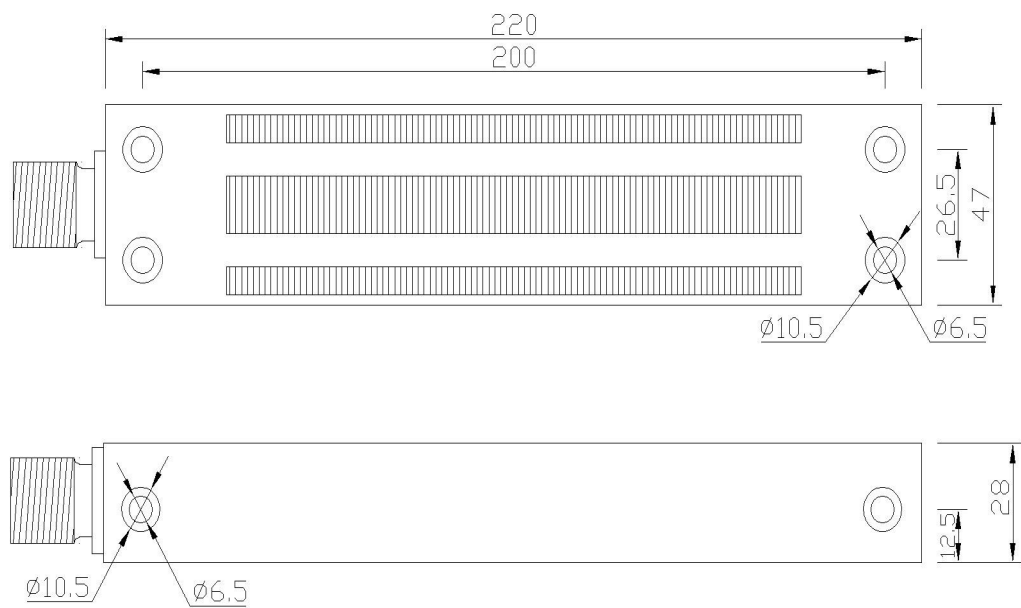

Adsorption board size chart

