

### EN

The safety device has to be installed and put in operation by specialized personnel, who is aware of the actual prescriptions about safety and accident prevention.


The device is available with the following lengths: 1200 - 1600 - 2000 - 2500mm. It can be shortened at will, starting from the opposite side of the terminal.

In case of an average 50 openings per day, the device has to be tested in its functionalities every 3 months. The controls needs to be recorded in their frequency.

The test has to be performed by specialized personnel, in the following manner:

- operate the closing of the gate.
- Press firmly the safety edge on the center and check that the automation stops.
- Operate the closure again and repeat the pressure on the safety edge on the upper and lower edge, near the endcaps, checking that the automation stops.

### 7A Wiring of 1 device per channel

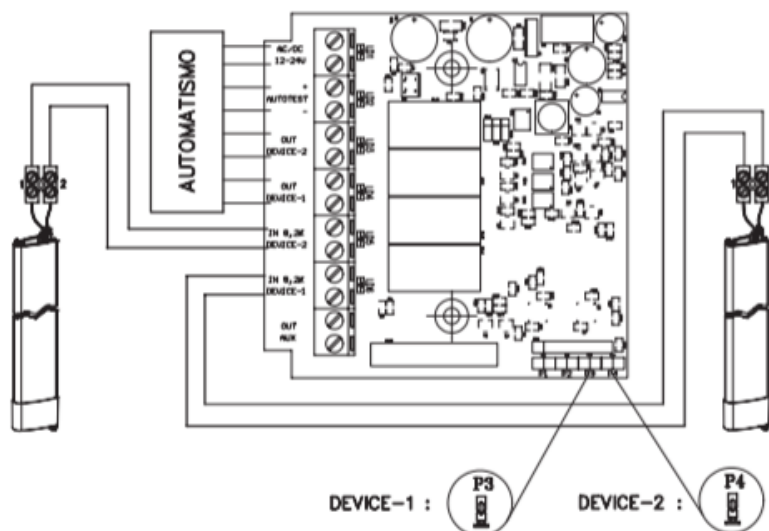

### 7B Wiring of 2 devices per channel (maximum allowed)

